


Product Specification
General Purpose Yellow EL Wire – Model 01S Y2
For Indoor and Outdoor* Use
Specific Characteristics

Typical Chromaticity Coordinates**


Voltage/Frequency	Chromaticity Coordinates	
	X	Y
100 V / 400 Hz	0.498	0.498
100 V / 800 Hz	0.499	0.497
100 V / 2000 Hz	0.500	0.495

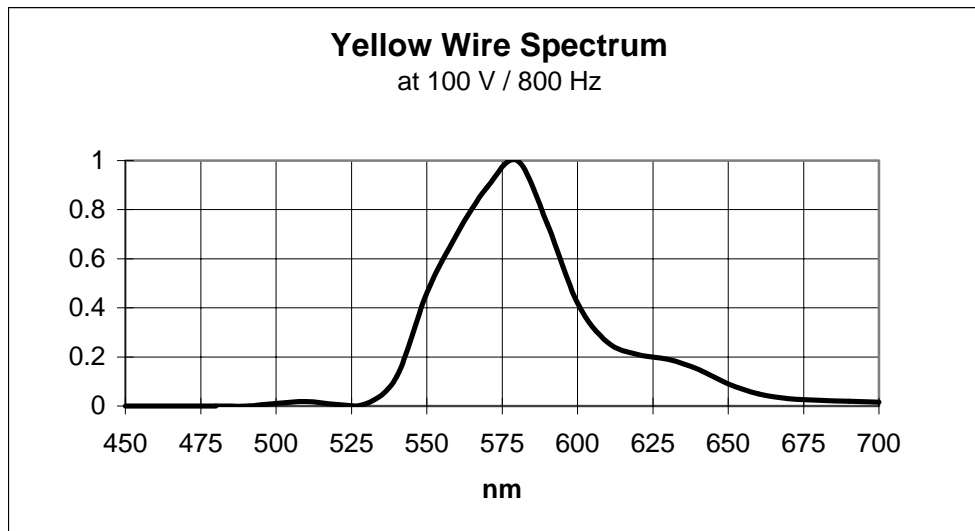

Typical** Initial Reference Brightness*** (cd/msq)

PD 0101/05
Rev. 29
13.09.2000

Voltage, VRMS	200 Hz	400 Hz	800 Hz	2000 Hz	4000 Hz
40	0.5	1.0	1.5	2.3	3.4
60	3.6	6.8	10.4	18.2	23.9
80	9.8	17.9	29.3	53.6	78.3
100	18.9	33.2	56.4	107.4	158.7
120	32.6	52.4	86.3	167.5	249.0

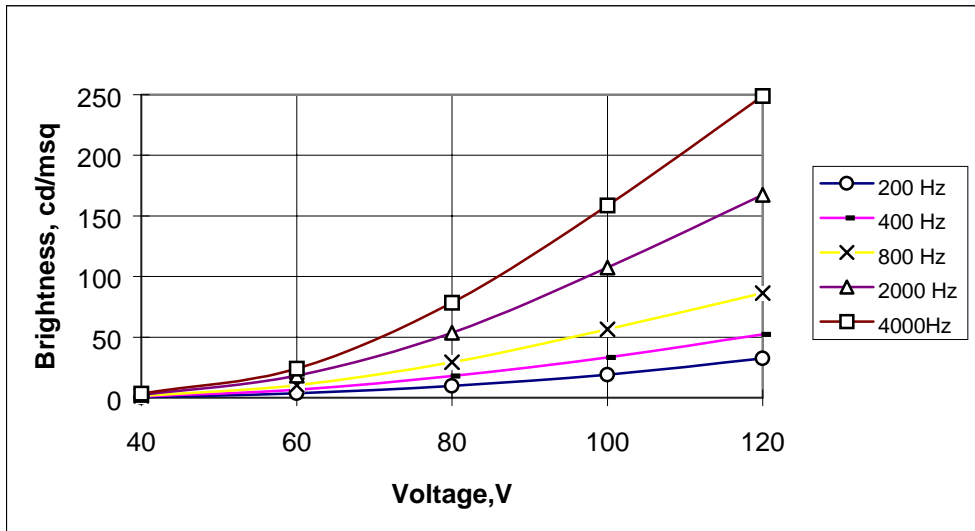

* Remark: Product operation under direct sunlight is not recommended!
For outdoors system design, please contact ELAM Technical Support for additional information.

** Remark: Actual parameters of each lot may vary from typical values within +/-20%. All parameters shown for room conditions.

*** Remark: The mentioned reference brightness values are related to the light emitting electroluminescent layer having diameter of 0.7 mm.